


HiLIGHT

Mobile Solar Light Tower

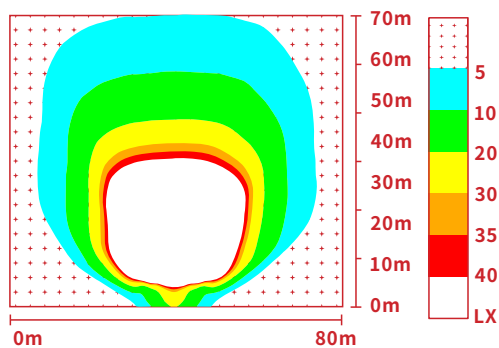

SPECIFICATION

BL8P-G9HHL1600	
Solar Panel	8 × 460W
Panel Lifting	0°~25° Hydraulic Lifting
GEL Battery	16 × 200Ah DC12V,Auto-Fan
Battery Capacity	38400Wh 80% DoC
System Voltage	DC48V
Battery Charger	Yes
LED Lamp	4 × 400W,240000Lms
Lighting Area (5 Lux)	3887m ²
Rotation	350° Electric
Tilt	90° Electric
Controller	80A MPPT
Mast & Height	9 Sections 9M
Mast Lifting	Hydraulic
Trailer Standard	US / AU / EU
Hitch	2" Ball / 3" Ring
Brake	Electric
Axle	Double
Tire	15 inch
Outriggers	4 ×
Lifting Ring	4 ×
Forklift Holes	2 ×
Working Temp	-35°C~60°C
Charging Time	8.8 hours
Running Time	19.2 hours
Dimension(mm)	4150*2250*2800
Weight	2800kgs
QTY in 20' / 40'	2 units / 4 units

OPTIONAL

LFP Battery	Backup Genset	Wind Turbine	Inverter
Victron	AL-KO	Skid Type	

CONTAINER LOADING

20' | 2 units



40' | 4 units

