


HiLIGHT

Mobile Solar Light Tower

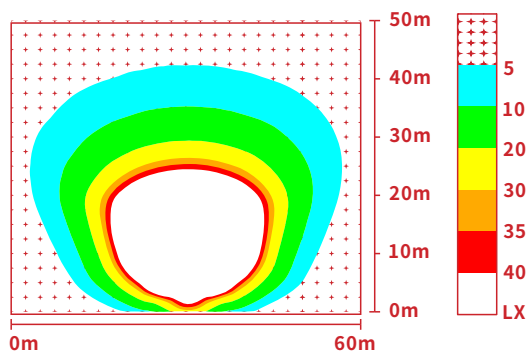

SPECIFICATION

BLEP-G9EHL600	
Solar Panel	3 × 435W
Panel Lifting	30°~45°, Electric Lifting
GEL Battery	6 × 200Ah DC12V
Battery Capacity	14400Wh 80% DoC
System Voltage	DC24V
Battery Charger	Yes
LED Lamp	4 × 150W, 90000Lms
Lighting Area (5 Lux)	2310m ²
Rotation	350° Electric
Tilt	90° Electric
Controller	60A MPPT
Mast & Height	5 Sections 9M
Mast Lifting	Electric Winch
Trailer Standard	US / AU / EU
Hitch	2" Ball / 3" Ring
Brake	Mechanical
Axle	Single
Tire	15 inch
Outriggers	4 ×
Lifting Ring	4 ×
Forklift Holes	2 ×
Working Temp	-35°C~60°C
Charging Time	9.3 hours
Running Time	19.2 hours
Dimension(mm)	3550*1650*2800
Weight	1400kgs
QTY in 20' / 40'	3 units / 7 units

OPTIONAL

LFP Battery	Backup Genset	Wind Turbine	Inverter
Victron	AL-KO	Skid Type	

CONTAINER LOADING

20' | 3 units



40' | 7 units

