

HiLIGHT

Mobile Solar Light Tower



SPECIFICATION

BL2P-G7MHL400	
Solar Panel	2 × 435W
Panel Lifting	10°~45° Manual Lifting
GEL Battery	4 × 200Ah DC12V
Battery Capacity	9600Wh 80% DoC
System Voltage	DC24V
Battery Charger	Yes
LED Lamp	4 × 100W,60000Lms
Lighting Area (5 Lux)	1481m ²
Rotation	350° Electric
Tilt	90° Electric
Controller	40A MPPT
Mast & Height	5 Sections 7M
Mast Lifting	Manual Winch
Trailer Standard	US / AU / EU
Hitch	2" Ball / 3" Ring
Brake	Electric
Axle	Single
Tire	14 inch
Outriggers	4 ×
Lifting Ring	4 ×
Forklift Holes	2 ×
Working Temp	-35°C~60°C
Charging Time	9.3 hours
Running Time	19.2 hours
Dimension(mm)	3700*2150*2750
Weight	1000kgs
QTY in 20' / 40'	6 units / 14 units


OPTIONAL

LFP Battery

Victron

AL-KO

Skid Type

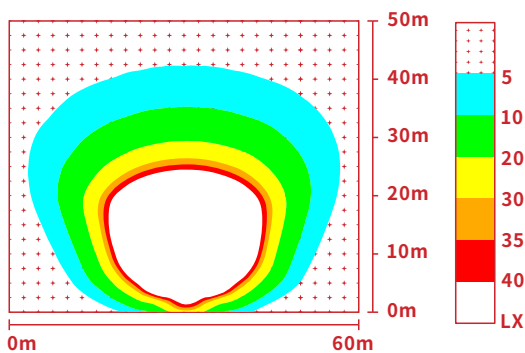

CONTAINER LOADING

20' | 6 units



40' | 14 units



The above parameters are for reference only. All products are subject to the actual products received.